


# Cook 'N Cool® Microwave/Refrigerator/Freezer With Internal Power Allocator Microwave 10 cu. ft. Frost-Free - Top Freezer

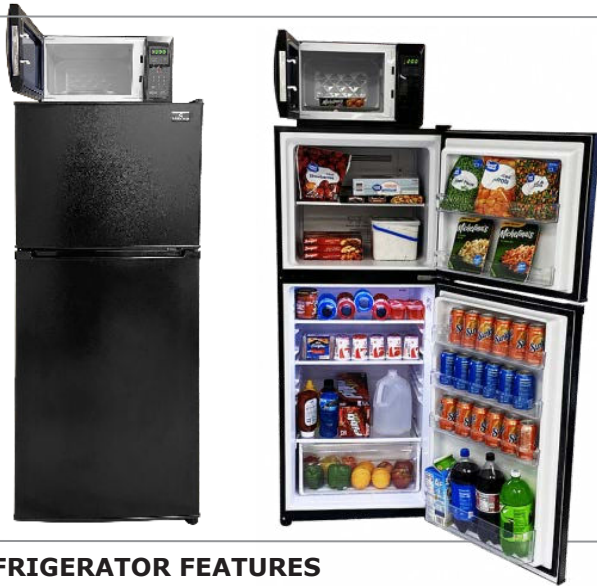

## CC1031F

Factory-Assembled

**Black:** CC1031FB


**White:** CC1031FW

Knock-Down Version

**Black:** CC1031FBKD

**White:** CC1031FWKD

Note: Doors comes standard with right hand hinge

The ARD1033F\*21R/L is  Listed by Underwriters Laboratories.



Refrigerator/Freezer Only  
(ARD1033F\*21R/L)  
\*W-white, B-black

### REFRIGERATOR FEATURES

Energy	ENERGY STAR® Qualified - Tier III 263 KWH/Yr Energy Consumption 20% less energy than Federal Standard
Defrost Type	Frost-Free
Refrigerant Type	R600A
Foaming Agent Type	HFO
Temperature Control	Full Range Control
Door Type	Easy-Clean Euro-Round Doors
Door Handles	Integrated Handles
Door-Swing	Reversible With Door Hinge Kit
Interior Lighting	Automatic Refrigerator Light
Crisper	1 Full-Width See-Thru Crisper
Interior Shelves	2 Full-Width Adjustable Glass Shelves 1 Full-Width Glass Crisper Cover
Refrigerator Door Storage	4 Full-Width Shelves Lower Shelf accepts 2-Liter Bottles
Freezer Interior	1 Full-Width Shelf
Freezer Door Storage	2 Full-Width Shelves
Leveling	2 Front Adjustable Leveling Feet
Capacity	10 cu. ft. Total Capacity 7.1 cu. ft. Refrigerator 2.9 cu. ft. Freezer

### MICROWAVE FEATURES with Internal Power Allocator


Capacity/Cooking Watts	0.9 cu. ft. / 900 watts
Control Type	Electronic Touch Pads
Turntable	11" Diameter Glass Turntable

### INSTALLATION REQUIREMENTS

Remove all packing material and tape. Install on a level floor or well-supported counter. Avoid any direct sunlight, heat source, or moisture. This product is designed to be *freestanding* and must be installed at least 2" from the wall, and the cabinet bottom is at least 3/4" to 1" above the floor or carpet, in order to let the air circulate freely around the unit. Also allow 2" of space on the sides and 4" on the top surface as well for the best performance. If other appliance such as a microwave is placed on top, allow 4" of space above it.

### IPA - INTERNAL POWER ALLOCATOR

Microwave with IPA Technology prevents overloaded electrical system when the microwave and refrigerator/freezer are operating on the same circuit. Max operating amperage at 100% power: 11.3 Amps



Internal Power Allocator outlet

Microwave cord to wall outlet

Refrigerator cord to IPA outlet

### ELECTRICAL

A minimum 15 AMP electrical supply is required (20 AMP electrical supply preferred). A time-delay fuse or circuit breaker and separate circuit is recommended. 115V., 60 Hz.

Refrigerator Operating Amps: 1.6A

Cook 'N Cool® - Maximum Operating Amps: 11.3A

Single 6 ft. power cord-to-outlet

The AM090H\*IPA is  Listed by Underwriters Laboratories.

### DIMENSIONS & WEIGHTS

	Product	Carton/Shipping
Height (inches)	69 1/2	70 3/4
Width (inches)	23 3/4	24 3/8
Depth (inches)	27	28 3/4
Weight (lbs)	142	158
Shipping Cube (cu. ft.)	-	28.1



Product specifications subject to change without notice.

Absocold, P.O. Box 1545, Richmond, IN 47375 Toll-Free: 800-843-3714 • Fax: 765-935-3450