

# Cook 'N Cool® Microwave/Refrigerator/Freezer With Internal Power Allocator Microwave 4.8 cu. ft. TopFreezer - Frost-Free



## CC482FB

Factory-Assembled

■ **Black:** CC482FB

Knock-Down Version

■ **Black:** CC482FBKD



Refrigerator/Freezer Only  
(ARD484F\*10R/L)  
\*W-white, B-black

### REFRIGERATOR FEATURES

Energy	ENERGY STAR® Qualified - Tier II 346 KWH/Yr Energy Consumption 15% less energy than Federal Standard
Defrost Type	Frost-Free
Refrigerant Type	R600a Refrigerant
Foaming Agent Type	HFO Foaming
Temperature Control	Full Range Control
Door Type	Easy-Clean Euro-Round Doors
Door Handles	Integrated Handles
Door-Swing	Reversible (Factory Standard, Right-Hand Hinge)
Interior Lighting	Automatic Refrigerator Light
Crisper	1 Full-Width See-Thru Crisper
Interior Shelves	2 Full-Width Adjustable Wire Shelves 1 Full-Width Glass Crisper Cover
Refrigerator Door Storage	3 Full-Width Shelves Lower Shelf accepts 2-Liter Bottles
Freezer Interior	1 Full-Width Shelf
Freezer Door Storage	2 Full-Width Shelves
Leveling	2 Front Adjustable Leveling Feet
Capacity	4.8 cu. ft. Total Capacity 3.38 cu. ft. Refrigerator 1.37 cu. ft. Freezer



The CC482FB Refrigerator now features a new digital temperature control unit.

### INSTALLATION REQUIREMENTS


Remove all packing material and tape. Install on a level floor or well-supported counter. Avoid any direct sunlight, heat source, or moisture. This refrigerator is designed to be freestanding — that is, the appliance is to be installed at least 3" from the wall and the cabinet bottom is at least ¾" to 1" above the floor or carpet, in order to let the air circulate freely around the refrigerator. Also allow at least 2" of space on the sides and 12" on the top surface as well.  
If other appliance such as a microwave is placed on top, allow 4" of space above it.

### MICROWAVE FEATURES with IPA

Capacity/Cooking Watts	0.9 cu. ft. / 900 watts
Control Type	Electronic Touch Pads
Turntable	11" Diameter Glass Turntable

### IPA - INTERNAL POWER ALLOCATOR

Microwave with IPA Technology prevents overloaded electrical system when the microwave and refrigerator/freezer are operating on the same circuit.  
Max operating amperage at 100% power: 11.3 Amps

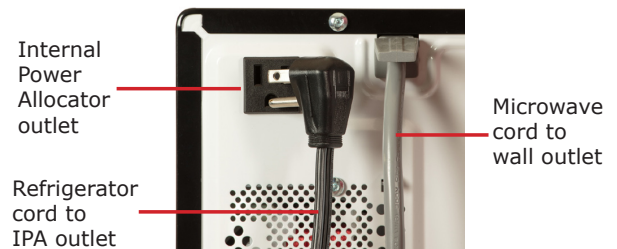

### ELECTRICAL

A minimum 15 AMP electrical supply is required (20 AMP electrical supply preferred). A time-delay fuse or circuit breaker and separate circuit is recommended.  
115V., 60 Hz.

Refrigerator Operating Amps:1.3A

Cook 'N Cool® - Maximum Operating Amps:11.3A

Single 6 ft. power cord-to-outlet

### DIMENSIONS & WEIGHTS

	Product	Carton/Shipping
Height (inches)	57	59 1/4
Width (inches)	18 1/2	21 1/4
Depth (inches)	22 1/4	25 1/4
Weight (lbs)	109	119
Shipping Cube (cu. ft.)	-	18.4



Product specifications subject to change without notice.